



LAUNDRY

## WASHER EXTRACTOR HI-85



### STANDARD FEATURES

- Roller bearings mounted in cast steel housing
- Large door opening and reliable door lock make loading and unloading fast with the 180 degree flexibility of the door. The silicon door gasket seals to the shell every time without fail
- Electronic variable frequency drive controls the motor
- Water reuse capable
- The PUNP microprocessor touch screen control center is easy to use and equipped with all needed features to ensure maximum productivity at the lowest cost of operation. The easily programmed 4 language display controls temperature, water levels, speed, and maintenance intervals.
- Fully enclosed and protected motor, V-belt transmission, and pulleys guarantee longevity.
- Standard voltages: 380-415/50/3, 208-240/50/60/3 or 440-460/60/3

### AVAILABLE OPTIONS


- Stainless steel side, top, & rear panels
- Direct steam heating
- Additional drain outlet
- Air cushion suspension system
- Water reuse inlet and drain
- EMI filter for CE
- PC programing kit

# WASHER EXTRACTOR HI-85

## Technical Data

Washer capacity	38.56 Kg (85 lbs.)
Drum dimensions (Ø x P)	914 mm x 610 mm
Door dimensions (Ø x h)	445 mm x 595 mm
Motor	5.6 kW 7.5 HP
Wash speed	40 RPM 0.8 G
Extraction speed (Distribution)	260 RPM (#1) 630 RPM (#2) (70 RPM)
Drain system	76.2mm outlet 849L/min capacity 1(2) drain outlet(s)
Basket volume	400L .4m <sup>3</sup>
Inlets	3/4" (Steam) 1" (Water) 2 water inlets 1 steam
Energy consumption (Pressure)	126 kg/hr. (Steam) 27 kW (Electric) (8 bar)
Machine dimensions (LxWxH)	1385 mm x 1110 mm x 1590 mm
Net weight (Shipping)	541 Kg (554 Kg)

## Detail & Dimensions

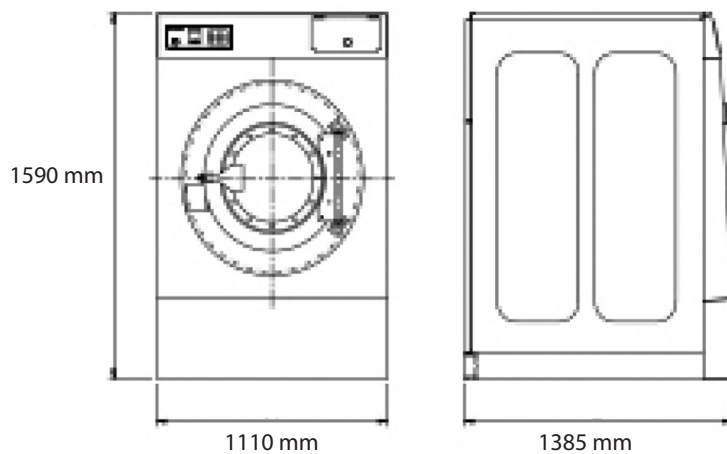

As continued product improvement is a policy of Powerline, specifications are subject to change without notice.



## POWERLINE EQUIPMENT COMPANY

Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480

[www.powerlinelaundry.com](http://www.powerlinelaundry.com)