



LAUNDRY

WASHER EXTRACTOR SI-200



AVAILABLE OPTIONS

- Tilt one way for easy unloading
- Tilt two way for loading and unloading
- Direct steam heating
- Additional drain outlet
- Air cushion suspension system
- Water reuse inlet and drain
- EMI filter for CE
- PC programming kit

STANDARD FEATURES


- Heavy duty frame
- Stainless steel panels
- All wetted parts are stainless
- Air operated door gasket
- Large door opening and reliable door lock make loading and unloading fast with the 180 degree flexibility of the door. The silicon door gasket seals to the shell every time without fail
- 5 compartment supply dispensers for both liquid and detergent. They are automatically flushed during each cycle
- 6 external liquid supply connections
- Fully enclosed heavy duty drive motor
- Bearings outside the wash solution
- 320G aided extraction speed allows for a save in money and time, minimizing
- 3 degree leanback for lower bearing loads
- Heavy duty suspension system
- Water reuse capable
- The PUNP microprocessor touch screen control center is easy to use and equipped with all needed features to ensure maximum productivity at the lowest cost of operation. The easily programmed 4 language display controls temperature, water levels, speed, and maintenance intervals.
- Fully enclosed and protected motor, V-belt transmission, and pulleys guarantee longevity.
- This fully stainless freestanding industrial machine is built to last
- Standard voltages: 380-415/50/3, 208-240/50/60/3 or 440-460/60/3

WASHER EXTRACTOR SI-200

Technical Data

Washer capacity	90.72 Kg (200 lbs.)
Drum dimensions (Ø x P)	1169 mm x 813 mm
Door dimensions (Ø x h)	622 mm x 900 mm
Motor	15 kW 20 HP
Wash speed	35 RPM 0.8 G
Extraction speed (Distribution)	277 RPM (#1) 700 RPM (#2) (62 RPM)
Drain system	101.6mm outlet 1698L/min capacity 1(2) drain outlet(s)
Chemical supply system	5 dry chemical compartments & liquid supply connections (.5")
Basket volume	870L .87m ³
Inlets	1" (Water) 1" (Steam) 2 water inlets 1 steam
Electrical consumption (Steam)	48kW (117 kg/hr.)
Machine dimensions (LxWxH)	2159 mm x 1702 mm x 1981 mm
Net weight (Shipping)	3080 Kg (3163 Kg)

Detail & Dimensions

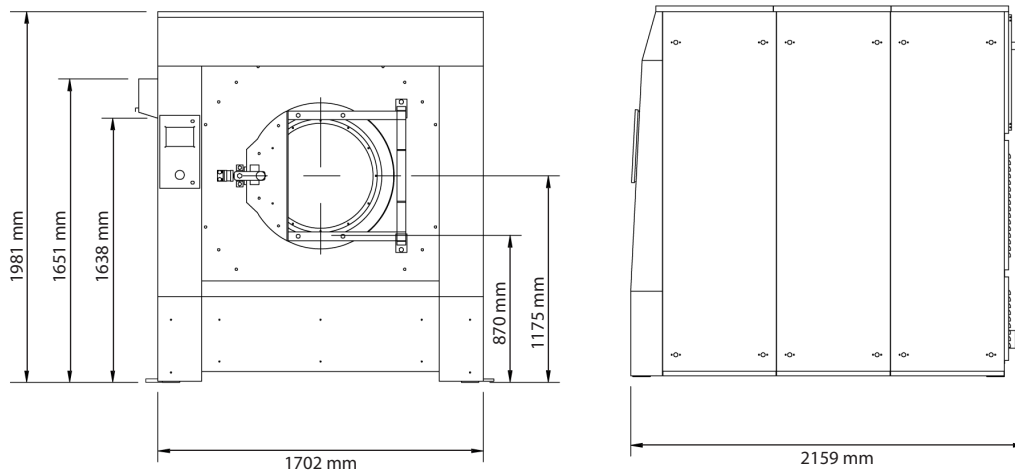

As continued product improvement is a policy of Powerline, specifications are subject to change without notice.



POWERLINE EQUIPMENT COMPANY

Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480

www.powerlinelaundry.com