



LAUNDRY

FLATWORK IRONER PF-18x120



AVAILABLE OPTIONS

- Single phase electrical service
- Digital temperature display for steam unit
- Warning lamp
- Special widths (3300 mm)
- EMI filter for CE or low voltage
- Export crating

STANDARD FEATURES


- Gas or steam heating
- Gas heating: LP or natural gas
- Variable speed with soft-start
- Easy to use electronic temperature and speed control with digital readout
- Jog forward/reverse
- Front or rear return
- Full exhaust canopy with external blower
- Electrical and mechanical protection devices
- Three phase electrical service
- Chrome plated cylinder
- Lift of interlocked end panels for easy maintenance
- 4 emergency stop buttons around the machine
- Nomex quality ironing belts
- Frequency inverter driven: Adjustable speed
- Safety features included: Electrical circuit protection, safety labels, hand guards, temperature resistant padding/straps, enclosed back, flame safeguards and much more.
- Standard voltages: 380-415/50/3, 208-240/50/60/3 or 440-460/60/3

FLATWORK IRONER PF-18x120

Technical Data

Roller diameter	457.2 mm
Working width	3000 mm
Speed range	2.5-14 m/min
Motors (Drive, delivery & blower)	0.75 kW 1 HP, 0.25 kW 0.33 HP, 1.5 kW 2 HP
Air flow	50cm
Exhaust duct	254 mm
Gas inlet	12.7 mm
Steam outlet (Inlet)	12.7 mm (19.05 mm)
Steam consumption (Pressure)	66.86 kg/hr (6.2-8.6 bar)
Electric consumption	36 kW
Gas heat input	284580 btu/hr
Machine dimensions (LxWxH)	1501.14 mm x 4059.94 mm x 2479.8 mm
Net weight	1730Kg (Gas) 1783Kg (Steam) 1843Kg (Electric)
Shipping weight	1865Kg (Gas) 1917Kg (Steam) 1973Kg (Electric)

Detail & Dimensions

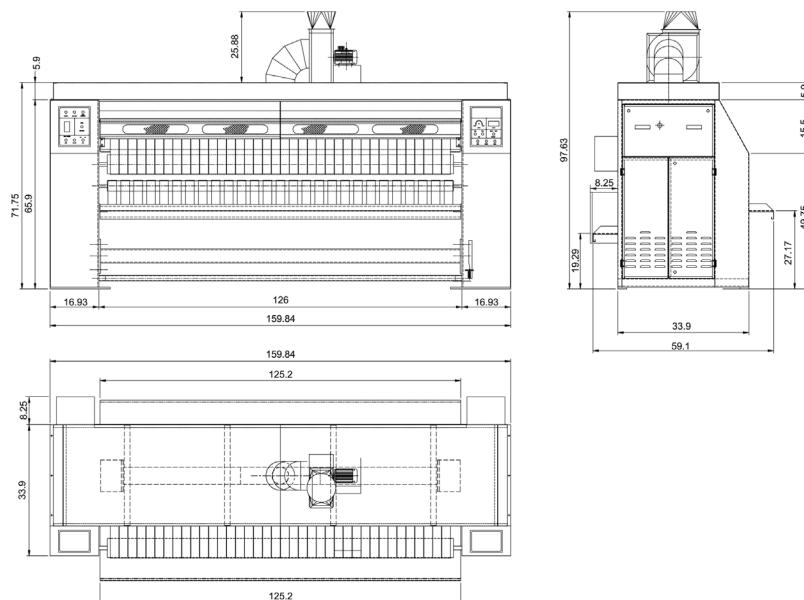

As continued product improvement is a policy of Powerline, specifications are subject to change without notice.



POWERLINE EQUIPMENT COMPANY

Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480

www.powerlinelaundry.com