



LAUNDRY

TUMBLE DRYER DP-250



AVAILABLE OPTIONS

- Variable frequency drive
- Steam or gas heating
- Air re-circulating system
- Stainless steel front
- Dual timer control
- 1 way tilting for easy unloading
- EMI filter for CE

STANDARD FEATURES


- Reversing cylinder
- Heavy duty drive system
- Cool down overload protection
- Temperature limit switches
- Soft start
- Stainless steel cylinder
- Rotational sensor
- Fire suppression system
- Automatic blower cleaning
- Large door opening and reliable door lock make loading and unloading fast with the 180 degree flexibility of the door. No gasket needed! Magnetically sealed and protected, machine is stopped whenever the door is opened. The door can be opened at any time you please.
- Fully enclosed heavy duty drive motor
- Large self-cleaning lint screens are accessible from the front exhaust fan, preventing fan clogging and vibration. The microprocessor monitors the lint filter and can stop the machine for necessary, but extremely easy maintenance
- Advanced microprocessor monitors temperature, drying action and performance. Equipped with a cool down and anti-wrinkle feature allows this computer to enhance safety by monitoring airflow.
- Rugged construction: Double sealed bearings with cast iron pulleys. Heavy gauge steel and welded design with stainless drying cylinder
- Assisted heating through instantaneous gas burners and steam damper that maintains steam intake
- Standard voltages: 380-415/50/3, 208-240/50/60/3 or 440-460/60/3

TUMBLE DRYER DP-250

Technical Data

Dryer capacity	113.4 Kg (250 lbs)
Basket dimensions (Ø x P)	1499 mm x 1240 mm
Basket motor	3.75 kW 5 HP
Blower motor (Gas/Steam)	7.5 kW 10 HP
Air flow	164cmm (Gas) 198cmm (Steam)
Exhaust duct	508 mm (Gas/Steam)
Gas inlet (Steam return)	38.1 mm (31.25 mm)
Steam consumption	500.8 Kg/hr *Supply: 50.8mm
Basket volume	2190L 2.19m ³
Machine dimensions (LxWxH)	2114 mm x 1650 mm x 2372 mm
Net weight	1798Kg (Gas) 1995 Kg (Steam)
Shipping weight	1855Kg (Gas) 2025 Kg (Steam)

Detail & Dimensions

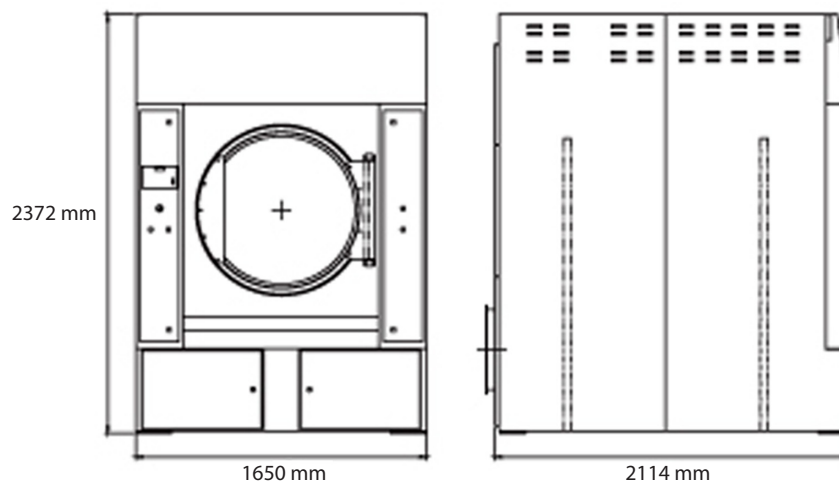

As continued product improvement is a policy of Powerline, specifications are subject to change without notice.



POWERLINE EQUIPMENT COMPANY

Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480

www.powerlinelaundry.com