



LAUNDRY

DRYING IRONER **PMCM-2500 PF/FE**



STANDARD FEATURES

- Frontal linen entry
- PLC control enables the user to save up to 128 ironing programs
- The ironing temperature and speed are both electronically controlled
- The ironing speed is automatically adjusted according to the ironing temperature variations, ensuring a constant ironing quality
- Large touch screen to select the fold # and linen exit side (Front or rear)
- Two independent working lines
- Cooling function lowers energy costs
- Ironing belts in NOMEX, making them high temperature resistant
- The special configuration of the ironing belts make the ironing quality comparable to the flatwork ironer
- Two big retractable collection trays
- Hand safe bar and 2 emergency stop buttons

AVAILABLE OPTIONS


- Vacuum introduction table
- Side gas exhaust
- Lateral gas exhaust
- Feeder option: Automatic feeder with introduction table (Model FE)
- Gas, steam, or electric power

DRYING IRONER PMCM-2500 PF/FE

Technical Data

| | |
|----------------------------------|--|
| Roller length | 2508 mm |
| Roller diameter | 502 mm |
| Ironing speed | 1-9 m/min *Compressed air pressure @ 6 Bar |
| Electric heating element (Power) | 18 x 2.7 Kw (48.6 Kw) |
| Average hourly production | 62 Kg/hr. Residual humidity @ 50% |
| Gas heating power | 53 Kw 2 burners 1" connection |
| Total power | 49.5 Kw (Electric) 1.1 Kw (Gas) 0.9 Kw (Steam) |
| Steam consumption (Pressure) | 100 Kg/hr. (1-12 Bar) 1" inlet & outlet |
| Suction capacity | 350 m ³ /h Steam, 350 m ³ /h Flue gas, 500 L/h Air |
| Machine dimensions (LxWxH) | 1583 mm x 3400 mm x 1678 mm |
| Packing dimensions (LxWxH) | 1100 mm x 3413 mm x 1868 mm |
| Gross weight / Net weight | 1413 Kg / 1313 Kg |

Detail & Dimensions

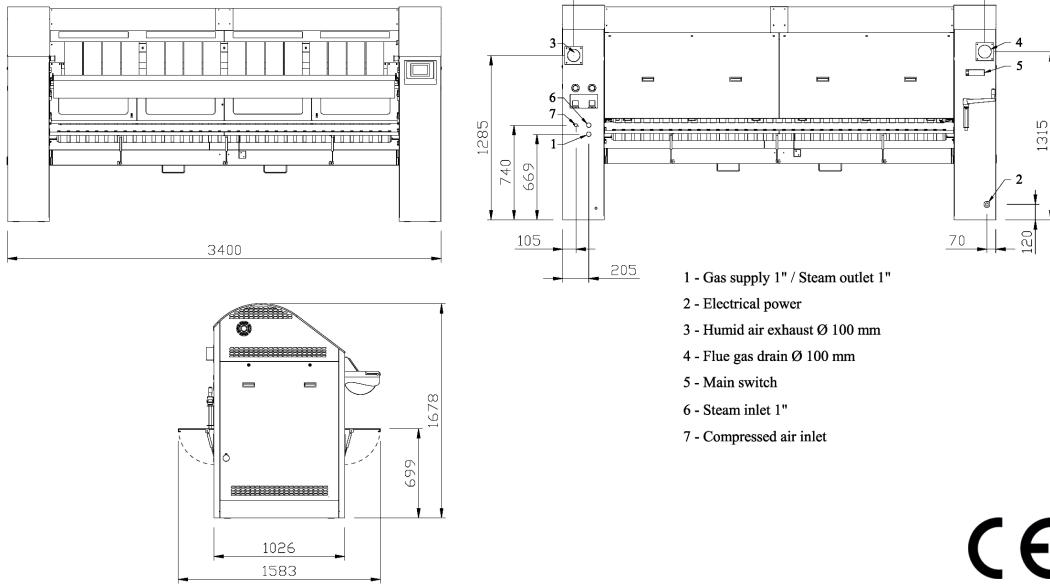

As continued product improvement is a policy of Powerline, specifications are subject to change without notice.



POWERLINE EQUIPMENT COMPANY

Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480

www.powerlinelaundry.com