



LAUNDRY

## FLATWORK IRONER **PFI-1750-33**



### STANDARD FEATURES

- Frontal linen entry and return
- IM 7 microprocessor with 30 ironing programs
- The ironing temperature and speed are both electronically controlled
- The ironing speed is automatically adjusted according to the ironing temperature variations, ensuring a constant ironing quality
- Cooling function lowers energy costs
- Current operation is displayed on this self diagnostic machine
- Ironing pressure controlled by microprocessor
- Ironing pressure constant along the entire roller length independent from the roller flattening
- The ironing pedal starts the machine in an incredibly quick manner
- No-panic bar: The ironer is mechanically released when pressed
- Hand safe bar: The roller stops when the user accidentally moves something behind the roller (i.e. a hand)
- Two emergency push buttons that cut the electrical supply when pressed

### AVAILABLE OPTIONS

- NOMEX cover:  
High temperature resistant
- Metal mesh and NOMEX cover to avoid the roller flattening due to use


# FLATWORK IRONER

## PFI-1750-33

### Technical Data

Roller length	1750 mm
Roller diameter	330 mm
Ironing speed	1-10 m/min
Electric heating element (Power)	3 x 3.5 Kw (10.5Kw)
Average hourly production	50 Kg/hr. Residual humidity @ 20%
Ironing pressure	214-322 Kg/m <sup>2</sup>
Total power	10.9 Kw (Electric)
Suction capacity	200 m <sup>3</sup> /hr.
Machine dimensions (LxWxH)	718.5 mm x 2262.5 mm x 1152.2 mm
Packing dimensions (LxWxH)	720 mm x 2263 mm x 1150 mm
Gross weight	232 Kg
Net weight (Net)	195 Kg

### Detail & Dimensions

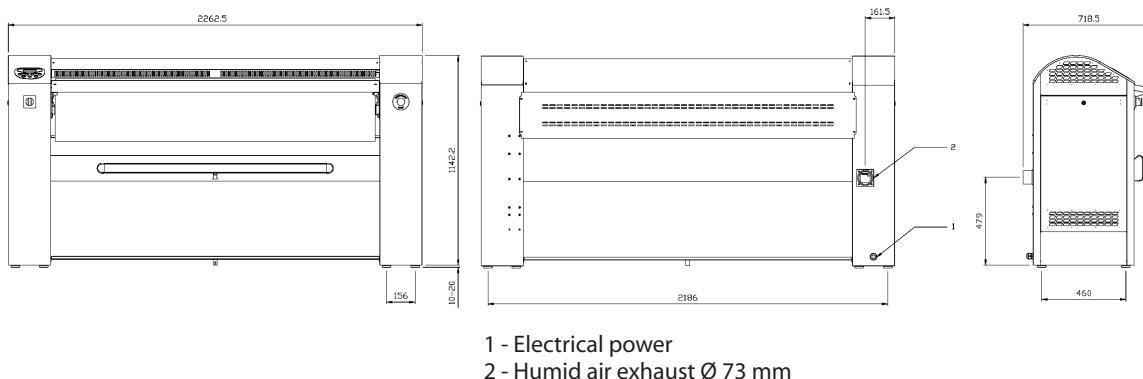

As continued product improvement is a policy of Powerline, specifications are subject to change without notice.



**POWERLINE EQUIPMENT COMPANY**

Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480

[www.powerlinelaundry.com](http://www.powerlinelaundry.com)