



LAUNDRY

WASHER EXTRACTOR PRC-55



AVAILABLE OPTIONS

- Connection to detergent pumps
- Water recovery system: The water from the last rinse is used in the first cycle of the next immediate program
- Drain pump &/or water inlet
- Gas, steam, or electric power

STANDARD FEATURES


- Top, frontal, and side panels in stainless steel AISI 304
- Ground fixed with chemical bolts (Supplied)
- Drum and outer drum in stainless steel AISI 304
- IM 8: An intuitive touch screen computer with up to 200 programs in 15 different languages. Also equipped with a large LCD screen making it easy to understand, use, and program with simple icons and photos
- IM 8 allows the user to customize wash cycles
- Half load programs with automatic reduction of washing level and detergent dosing available as well
- GSM remote assistance: Each machine is equipped with a GSM module to allow for remote diagnosis and service
- USB port: Allows for file downloads from machine to PC or from machine to machine
- Motorized door lock: An automatic door lock that is activated at the start of the program
- Ergonomics: The display is titled to avoid any reflection on the screen. It's large door diameter makes the loading/unloading easier

WASHER EXTRACTOR PRC-55

Technical Data

Washer capacity	55 Kg
Drum dimensions (ØxP)	1080 mm x 603 mm (530 mm load Ø)
Wash speed	35 RPM (408 RPM Low speed)
Electric heating element	6 x 5 Kw
Total electric power (Consumption)	39 Kw (22 Kwh)
G-factor	100
Drum volume	552L
Water consumption	960L (227L Low level) (238L High level)
Steam consumption (Max. pressure)	39 Kg (4.5 Bar) *9kW total power
Machine dimensions (LxWxH)	1300 mm x 1430 mm x 1868 mm
Packing dimensions (LxWxH)	1500 mm x 1540 mm x 2020 mm
Gross weight / Net weight	925 Kg / 878 Kg

Detail & Dimensions

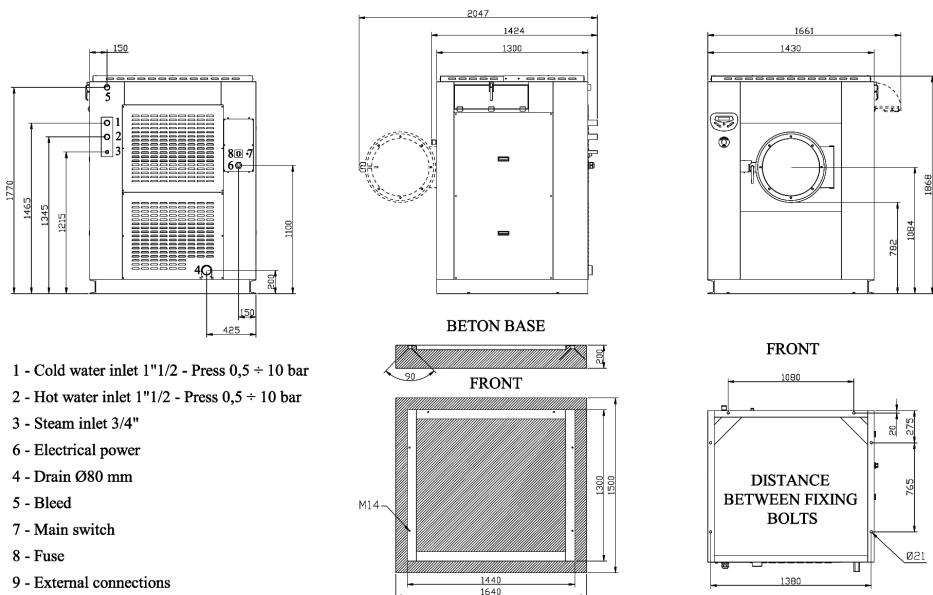

As continued product improvement is a policy of Powerline, specifications are subject to change without notice.



POWERLINE EQUIPMENT COMPANY

Pulaski Street, Norwalk, CT 06851 USA. Tel: 203-847 2357 Fax: 203-847 6480

www.powerlinelaundry.com